






AMBER
46% CO, 37% VI, 17% LI
470 gr/mq - H cm 150
Martindale: 35.000 cycles
Colour fastness to light: 5/6
Pilling test: 4/5
Fastness to dry rubbing: 5 / to wet: 5




col. 008

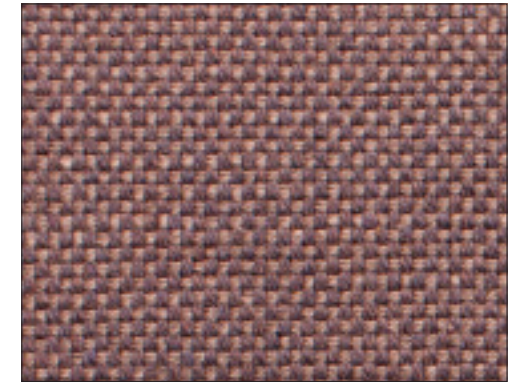


col. 028

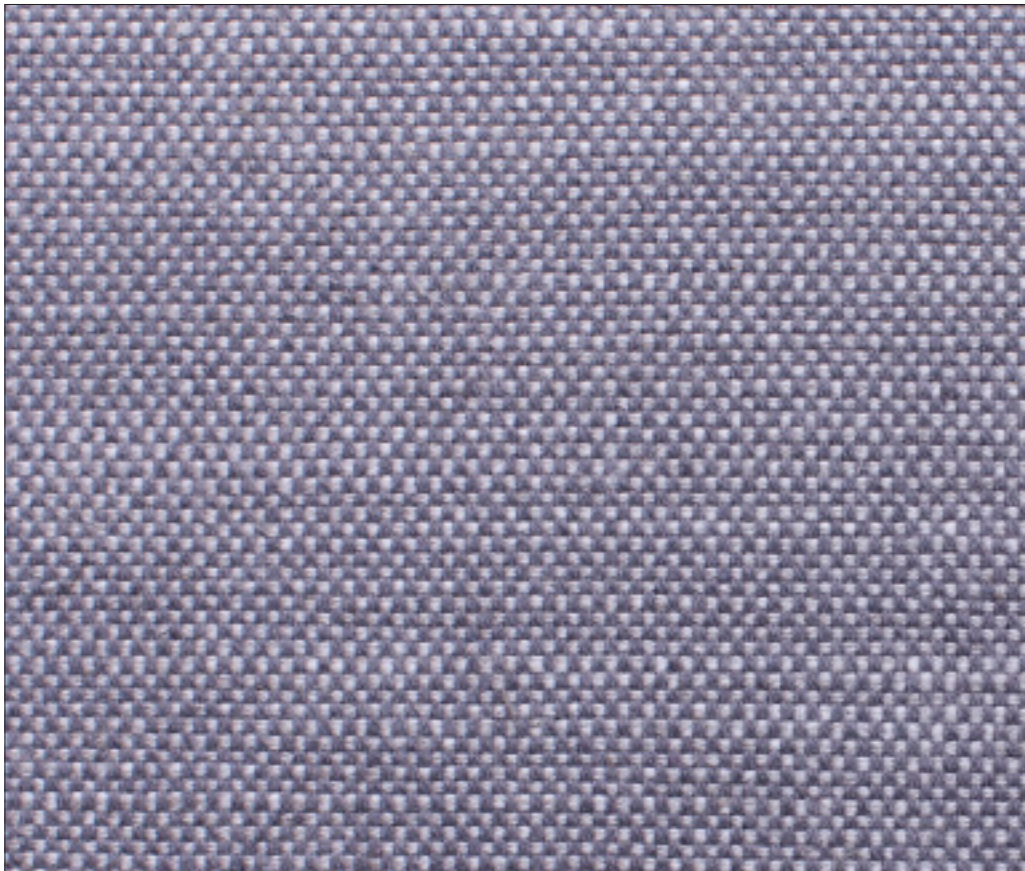

col. 005

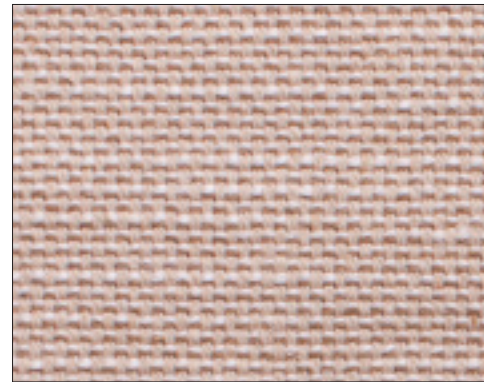


col. 033

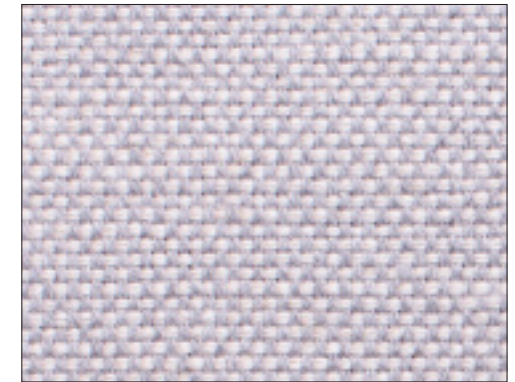


col. 037




col. 039

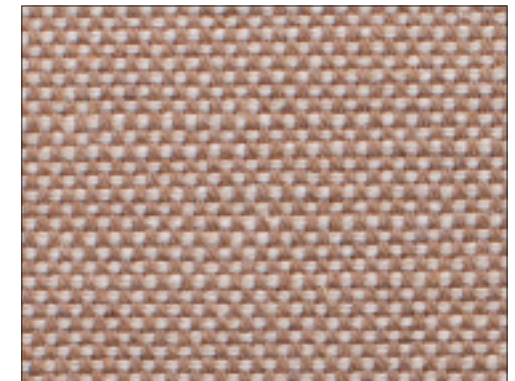


col. 044

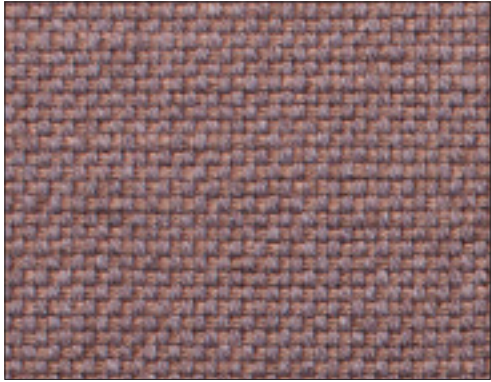


col. 047

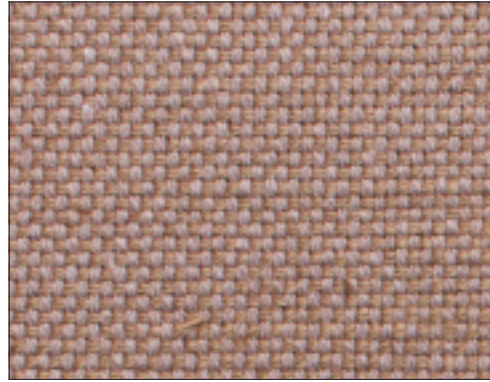

col. 390

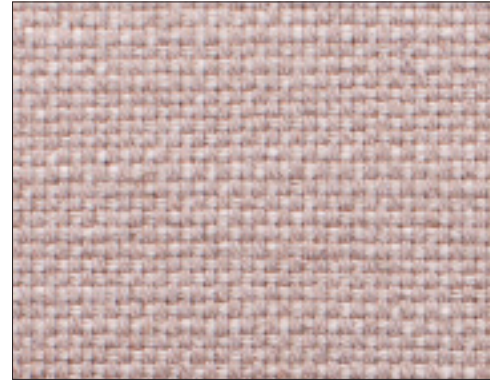

col. 391

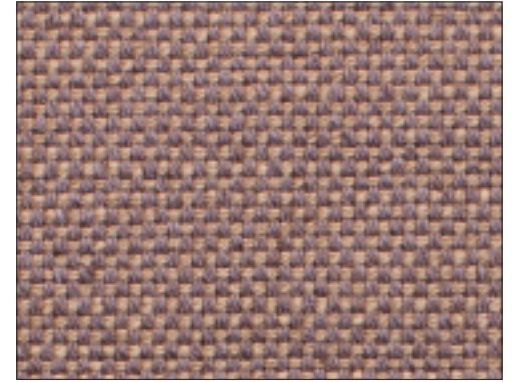


col. 470



col. 500



col. 801

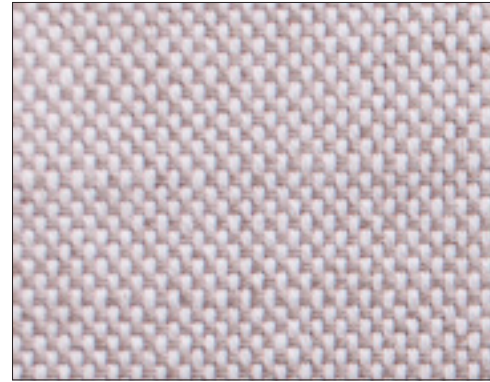

col. 802